


# iDISPLAY™ Tablet 21.5" UIT221



The iDISPLAY Tablet 21.5" is the perfect medium to capture attention, with high viewing angles and small footprint, it is well suited as a free standing floor display, in portrait and landscape format. Operating on an Android operating system and powered by Pulse technology, this slim and elegant display includes all of the solutions needed for commercial locations. Attach to any standard TV/monitor Vesa bracket - and just turn on the power. A fully interactive commercial display using capacitive touch (with built in WiFi and LAN) and a host of integrated features. With the option to expand 3G\* services with a USB dongle\* (inserted in the secure back cover), this is the perfect alternative to expensive PC based displays, offering a versatile solution for many industries and applications.

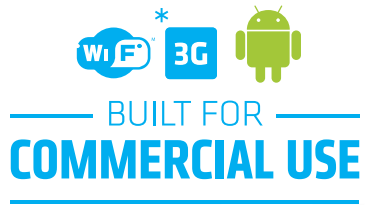

\*3G Optional, Pending carrier compatibility/availability.  
For more information about iDISPLAY Tablets please  
visit our website: [www.outform.com/idisplay](http://www.outform.com/idisplay)

**OUTFORM™**

Panel Information	Screen Size	21.5"
	LCD Brand	AUO, T215HVN01.0
	Resolution	1920 x 1080
	Brightness	250cd/m2
	Contrast Ratio	3000
	Aspect Ratio	16:9
	Active Area size(HxV)	476.64 x 268.11
	Viewing Angle	89°/89°/89°/89°
	Touch Technology	Capacitive, G+G, 10points
Hardware and OS	CPU	RK3188, Quad-core, 1.6G
	Graphics Hardware	3D Graphics
	Internal Memory(RAM)	1GB
	Flash Memory	8GB
	Operating System	Android 4.4 Kit Kat
	Battery	N/A
Video/Images	Supported Formats	MPG-1;MPG-2;MPG-4;H.263;H.264;VC-1;RV;VP6/VP8;MVC;JPEG
	HDMI Output	N/A
Audio	Speakers	2 x 2W
	Audio Codecs	Supports: MP3, WMA, AAC, FLAC etc
Communications	Bluetooth	Supports Bluetooth 3.0
	Wi-Fi	Wi-Fi 802.11b/g/n
	Wired Ethernet	RJ45, 10M/100M
	GPS	Supports GPS dongle ext (Optional)
	Wireless 3G/4G	Supports USB Dongle (Optional)
General information	Color	Black/White
	Camera	2.0MP Front
	I/O ports	DC in: 12V 3A, Earphone x1, RJ45 x1, USB2.0: HOST x1, USB2.0: Device x1
	Accessories	Adapter, User manual, Power cable
	Sensors	3-Axis Sensor
	Power Supply	12V/3A
	Power Consumption	<30W
	Operation Temperature	0-40 centigrade
	Relative Humidity	0.85
Certifications	ROHS, CE/FCC, PSU with UL	
Dimensions	Size (W x D x H)	536 x 328 x 35mm
	NET Weight	4.8Kg
	Product Carton Size	756 x 99 x 393mm
	Master Carton Size	774 x 261 x 415mm
	Master Carton Weight	15.23Kg
	Units per Master Carton	2pcs/Carton