


iDISPLAY™ Tower UIK1038

BUILT FOR
COMMERCIAL USE



The iDISPLAY Tower is a visually stunning and unique all-in-one floor display that will highlight your product and demand attention with its dazzling ultra-bright LCD screen.

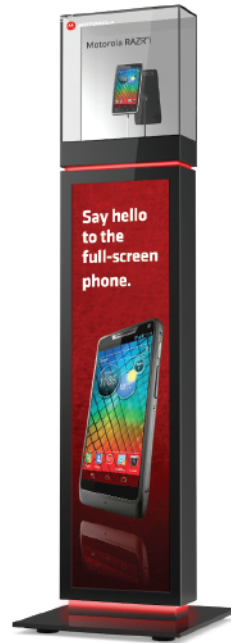

400mm
15.75"



400mm
15.75"

1423mm
56.02"

**Data plan required. 3G is available in select markets through select carriers. Check with your local carrier. For more information about iDISPLAY please visit our website: www.outform.com/idisplay*



Panel Information	Screen Size	38"
	Resolution	1920 x 454 or 1920x504
	Brightness	700cd/m ²
	Contrast Ratio	1400:1
	Aspect Ratio	Approx. 16:4.2
	Active Area size(HxV)	930.2x243.2mm
	Viewing Angle	89°/89°/89°/89°
Hardware and OS	CPU	1Ghz Dual-Core ARM® Cortex™-A9 Processors with 1 MB L2 cache & Neon VFPv3.
	Graphics Hardware	3 GPU's providing 3D graphics with 4 shaders up to 200MT/s & 1000Mpxl/sec. Hardware Video/Audio Codecs and hardware assisted UI, OpenGL, etc.
	Internal Memory	1GB, 64-bit wide, DDR3 SDRAM.
	Flash Memory	8GB Internal Flash Memory (approx. 1.5GB is used for OS). *Can be expanded with micro-SD Card (cards up to 64GB available).
	Operating System	Android 4.0.4 (ICS).
Video	Supported Formats	Video - H.264, DivX, MPEG-2, MPEG4/Xvid, etc. NOTE: Max. recommended bit rate is 3.5mbps. Images - JPG, BMP, PNG, etc. NOTE: Max. recommended resolution for video & images is 1920 x 504.
	Playback Software	Built-in Software allows for easy setup of a Playlist of videos and/or stills which can be looped infinitely without any additional software. Alternatively, any installed app can be auto-started on boot up.
	Content Management Systems (CMS) and Mobile Device Management (MDM)	Compatible with a number of 3rd Party CMS, MDM & Remote Access Software solutions, Call us for latest details.
Audio	Audio Codecs	MP3, MP4, 3GP, WAV, etc.
Communications	Bluetooth	Bluetooth 2.1 + EDR specification (Class 3 Radio).
	WIFI	Built in Wi-Fi: 802.11 b/g/n with speeds up to 54mbps. Operating frequency band: 2.400-2.484 GHz (Channels 1-14). Supports "Wi-Fi hotspot" feature.
	Wired Ethernet	10/100 Ethernet through the use of a RJ45 connector.
	3G Wireless Data Modem	Optional 3G PCIe slot for accommodating Wireless data modem modules. *Data plan required. 3G is available in select markets and through select carriers. Check with your local carrier for details.
General information	Color	Black or white
	I/O ports	2 x USB 2.0 Ports with type A connector, One port is software switchable from Host to Device mode for connecting to PC or other host computer.
	Connectors For accessories	3.5mm Headphone Jack (for Audio In/Out). 6Pin connector for attaching optional "Connect Box" for control by Motion Sensor and up to 12 Push Buttons.
	Power Supply	60W 110~240V auto switch adapter for the LED lights; LED display and media player come with built in PSU with power cable.
	Operation Temperature	0°-40°c
	Relative Humidity	40% to 70%
	Approvals and Certifications	ROHS, FCC and CE Compliant, PSU is also UL compliant.
Dimensions	Size (W x D x H)	400mm x 400mm x 1423mm
	Weight	35kg
	Package Size	1120mm x 570mm x 658mm
	Package Weight	75kg
	Units Per Package	1